

### [I-21/120/2024-W&M Section]

# GOVERNMENT OF INDIA/भारत सरकार

## MINISTRY OF CONSUMER AFFAIRS, FOOD AND PUBLIC DISTRIBUTION

उपभोता मामले, खाद्य एवं सार्वजनिक वितरण मंत्रालय

DEPARTMENT OF CONSUMER AFFAIRS/ उपभोक्ता मामले विभाग LEGAL METROLOGY DIVISION/ विधिक मापविज्ञान प्रभाग

Krishi Bhawan/कृषि भवन, नई दिल्ली Dated/दिनांक-: 01.05.2024

#### Certificate of Approval of Model/ मॉडल का अनुमोदन प्रमाणपत्र


Whereas the Central Government, after considering the report submitted to it by prescribed authority, is satisfied that the model described in the said report (see the figure given below) is in conformity with the provisions of the Legal Metrology Act, 2009 (1 of 2010) and the Legal Metrology (Approval of Models) Rules, 2011 and the said model is likely to maintain its accuracy over periods of sustained use and to render accurate service under varied conditions;

Now, therefore, in exercise of the powers conferred by section 22 of the Legal Metrology Act, 2009 (1 of 2010) read with sub-rule (6) of rule 8 and sub-rule (4) of rule 11 of the Legal Metrology (Approval of Models) Rules, 2011, as per OIML R 50, the Central Government hereby issues the certificate of approval of the model of Continuous Totalizing Automatic Weighing Instruments (Belt Weigher) with of accuracy class-0.5 of series "MATPRO-7001" and with brand name "MATPRO SOLUTIONS" (hereafter in referred to as the said model), manufactured by M/s Matpro Solution Private Limited, Plot No. W-45, Shirgaon MIDC, Badalapur, Dist.:Thane, Maharashtra-421503 and which is assigned the approval mark IND/09/24/208 (the picture of the model is given below as Figure 1);

### Technical Data:

Teenment Bata.	
Working Principle	Electronic and Load cell based
Mass Measuring Device	Strain Gauge Type of Load cell
Procedure adopted for testing & conformity	OIML R 50
Accuracy class	1
Maximum Flow Rate (Qmax)	3000 t/hour
Minimum Flow Rate (Qmin)	50 t/hour
Belt Speed	1 to 5 m/sec
Totaizer scale interval (dt)	100 kg
Display	LCD
Min. totalized load $\Sigma$ min	60 t
Power Supply	230 V, 50 HZ AC

Figure 1

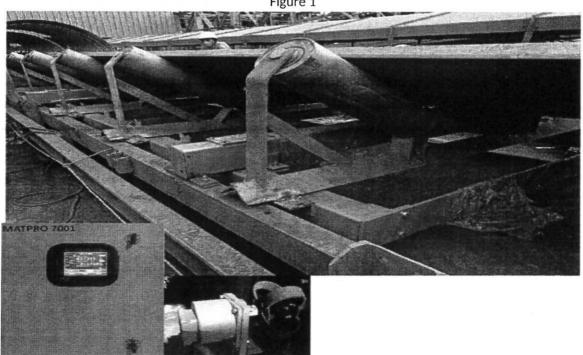

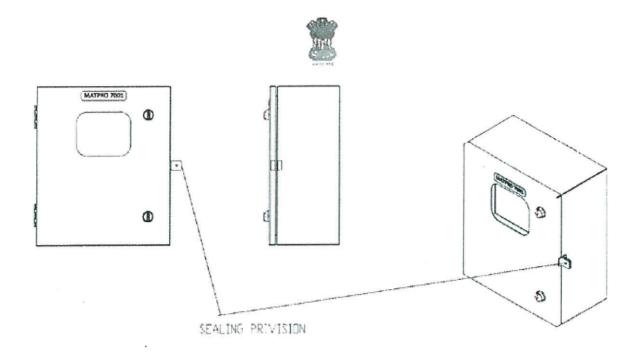


Figure 2

Sealing is done by passing the sealing wire through the holes provided on the body of machine. A lead seal is put at the end of the wire for stamping purpose (a typical schematic diagram of sealing provision to prevent the fraudulent practices of the model is given above as Figure 2). A dip switch has also been provided in mother board to disable access to external calibration.

Further, in exercise of the power conferred by sub-rule (9) of rule 8 of the Legal Metrology (Approval of Models) Rules, 2011, the Central Government hereby declares that this certificate of approval of the said model shall also cover the weighing instruments of similar make, accuracy and performance of same series with maximum flow rate up to 5000 t/hour manufactured by the same manufacturer in accordance with the same principle, design and with the same materials with which, the said approved model has been manufactured.

[F.No. I-21/120/2024-W&M Section]

Ashitosh

(Ashutosh Agarwal आशुतोष अग्रवाल) Director (Legal Metrology) to Govt. of India/ निदेशक (विधिक माप विज्ञान) भारत सरकार Phone/दरभाष01123386194

Email/ई-मेल: dirwm-ca@nic.in

Online Application No. 16588