



Online application no. 23577

[I-21/23/2026-W&M Section]

GOVERNMENT OF INDIA/भारत सरकार
MINISTRY OF CONSUMER AFFAIRS, FOOD AND PUBLIC DISTRIBUTION
उपभोक्ता मामले, खाद्य एवं सार्वजनिक वितरण मंत्रालय
DEPARTMENT OF CONSUMER AFFAIRS/ उपभोक्ता मामले विभाग
LEGAL METROLOGY DIVISION/ विधिक मापविज्ञान प्रभाग

Krishi Bhawan/कृषि भवन, नई दिल्ली

Dated/दिनांक:- 03. 07..2026

Certificate of Approval of Model/ मॉडल का अनुमोदन प्रमाणपत्र

Whereas the Central Government, after considering the report submitted to it by the prescribed authority along with the EU type examination certificate no.- DE-15-MI002-PTB001, Revision 12 issued by Physikalisch-Technische Bundesanstalt, Germany is satisfied that the model described in the said report (see the figure given below), is in conformity with the provisions of the Legal Metrology Act 2009(1 of 2010) and the Legal Metrology (Approval of Models) Rules, 2011 and the said model is likely to maintain its accuracy over periods of sustained use and to render accurate service under varied conditions;

Now, therefore, in exercise of the powers conferred by section 22 of the Legal Metrology Act, 2009 (1 of 2010) read with sub-rule (6) of rule 8 and sub-rule (4) of rule 11 of the Legal Metrology (Approval of Models) Rules, 2011, the Central Government hereby issues the certificate of approval of the model of Gas meter, Type: "FLOWSIC500" of accuracy class: 1.0 (hereinafter referred to as the said model) manufactured by M/s Endress+Hauser SICK GmbH+Co.KG, Bergener Ring 27, 01458 Ottendorf-Okrilla and imported & marketed in India without any alteration before or after sale by M/s Endress+Hauser (India) Private Limited, India 7B, 7th Floor, Godrej One, Pirojshahnagar, Eastern Express Highway, Vikhroli , Mumbai, Maharashtra-400079 which is assigned the approval mark IND/09/26/309 (the picture of the model is given below as Figure 1);

Valid until: 10.04.2027

Figure 1






Technical Data:

Accuracy Class	1.0
Gas Temperature	-40 °C to +70 °C
Ambient temperature	-40 °C to +70 °C
Storage temperature	-40 °C to +80 °C
Mechanical factors	Class M2
Electromagnetic factors	Class E2
Operating pressure range	0 bar to 20 bar
Ingress protection rating	IP66

Nominal diameter	Qmin	Qt,min	Qmax	Decimal places	
[mm]	[m³/h]	[m³/h]	[m³/h]	8 digit	9 digit
DN50	1.0	6.5	65	2	3
			100		
			160		
DN80	2.5	16	160	1	2
			250		
			400		
DN100	4.0	25	250		
			400		
			650		
DN150	4.0	25	650		
			1000		

Software Details:

Version	Checksum
V2.04.00	0x412C
V2.04.02	0xB6F8
V2.05.00	0x9EED
V2.07.00	0x1C03
V2.08.00	0xF942
V2.09.00	0x344D
V2.013.00	0x859D
V2.015.00	0x509A
V2.016.01	0x5E40
V2.017.10	0xF1F9
V2.017.14	0x6242
V2.018.10	0x1C60
V2.018.11	0x624D

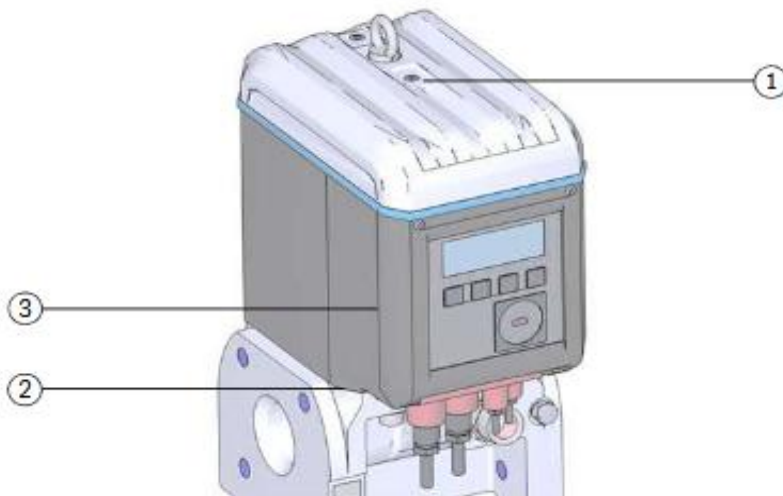

- 1 Seal position
- 2 Possible position of the adapter seal
- 3 Possible position of the electronic cover seal

Figure-2

A typical schematic diagram of sealing provision to prevent the fraudulent practices of the model is given above as Figure 2.

[F.No.I-21/23/2026-W&M Section]



(Ashutosh Agarwal/आशुतोष अग्रवाल)
Director (Legal Metrology) to Govt. of India/ निदेशक (विधिक माप विज्ञान) भारत सरकार
Phone/दूरभाष 011-23389489
Email/ई-मेल: dirwm-ca@nic.in